

Visit nipponpulse.com to download 3D CAD drawings and 2D prints of this motor.

| | S500D | | S500T | | S500Q | | |
|----------------------------------------------|---------------------------|----------------------------|-------------------------|--------------------------|-------------------------|--------------------------|--------------------------|
| Electrical Specs | S500D | S500D 2S | S500T | S500T 3S | S500Q | S500Q 4S | S500Q 2S |
| Continuous Force ¹ | 289N (65lbs) | | 440N (99lbs) | | 585N (132lbs) | | |
| Continuous Current ¹ | 3.8Arms | 1.9Arms | 5.8Arms | 1.9Arms | 7.7Arms | 1.9Arms | 3.9Arms |
| Acceleration Force ² | 1156N (260lbs) | 1157 (260.2lbs) | 1760N (396lbs) | | 2340N (526lbs) | | |
| Acceleration Current ² | 15.2Arms | 7.6Arms | 23Arms | 7.7Arms | 31Arms | 7.7Arms | 15Arms |
| Force Constant (K _f) | 76N/Arms (17.1lbs/amp) | 152N/Arms (34.2lbs/amp) | 76N/Arms (17lbs/amp) | 228N/Arms (51lbs/amp) | 76N/Arms (17lbs/amp) | 304N/Arms (68lbs/amp) | 152N/Arms (34lbs/amp) |
| Back EMF (K _e) | 25V/m/s (0.64V/in/s) | 51V/m/s (1.31V/in/s) | 25V/m/s (0.64V/in/s) | 76V/m/s (1.95V/in/s) | 25V/m/s (0.64V/in/s) | 101V/m/s (2.59V/in/s) | 51V/m/s (1.31V/in/s) |
| Resistance 25°C, ³ | 4.4Ω | 18Ω | 3.3Ω | 30Ω | 2.2Ω | 35Ω | 8.8Ω |
| Inductance ³ | 27mH | 108mH | 20mH | 178mH | 13mH | 211mH | 53mH |
| Electric Time Constant | 6.14ms | | 6.0ms | | 6.0ms | | |
| Max. Rated Voltage (AC) | 240V | | | | | | |
| Fundamental Motor Constant (K _m) | 36.26N√W | 36.28N√W | 41.76N√W | | 51.22N√W | | |
| Magnetic Pitch (North-North) | 180mm (7.09in) | | | | | | |

Is this the proper Linear Shaft Motor for your application? Use our [SMART sizing program](#) to assist in your decision.

This motor can be customized to fit your application demands; contact your application engineer for more information.


¹ Based on a temp rise of coil surface of 110°K over 25°C ambient temperature stalled forcer, and no external cooling or heat sinking.

² Can be maintained for a maximum of 40 seconds. Higher forces and current possible for short periods of time, consult Nippon Pulse for more information.


³ All winding parameters listed are measured line-to-line (phase-to-phase).

| Thermal Specs | S500D | S500T | S500Q |
|---------------------------------------------|-------------------|-----------------|-------------------|
| Max Phase Temperature ⁴ | 135°C (275°F) | | |
| Thermal Resistance (Coil) (K _c) | 1.7°C/W (3.7°F/W) | 1°C/W (2.2°F/W) | 0.8°C/W (1.8°F/W) |

⁴ The standard temperature difference between the coil and the forcer surface is 40°C.

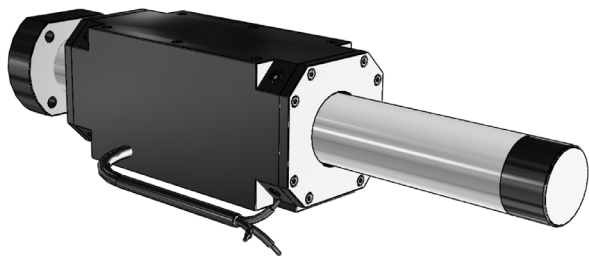


Bus Voltage

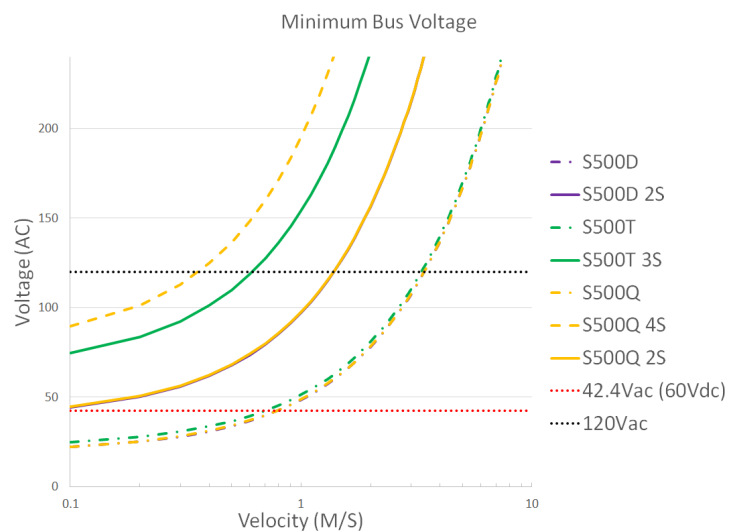

Part Numbering System

| | | | | | | |
|---|-------------------|-------------------------------------------------------------------------------|--------------------------------------------|------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------|
| S | Shaft Size 500 | Forcer Size (A) <u>X</u> | Parallel Option <u>XX</u> | Usable Stroke (S) <u>XXXXst</u> | Options <u>XX</u> | Options <u>XX</u> |
| | | D: Double (2) windings T: Triple (3) windings Q: Quadruple (4) windings | Blank: Single Motor PL: Parallel Motors | 200-2000mm | Blank: Standard WP: Water Resistant HA: Digital Hall Effect CE: CE type motor | Blank: Standard FO: Forcer Only SO: Shaft Only |

| Forcer Specs | S500D | S500T | S500Q |
|------------------------|-----------------------------|-----------------|-----------------|
| Forcer Length (A) | 240mm (9.45in) | 330mm (12.99in) | 420mm (16.54in) |
| Forcer Width | 100 x 105mm (3.94 x 4.13in) | | |
| Forcer Screw Pitch (P) | 80mm (3.15in) | 125mm (4.9in) | 170mm (6.7in) |
| Forcer Weight | 10kg (22lbs) | 13kg (28.7lbs) | 15kg (33.1lbs) |
| Gap | 1.75mm (0.07in) | | |
| Screw | M8 | | |
| Tightening Torque | 12.5 Nm | | |

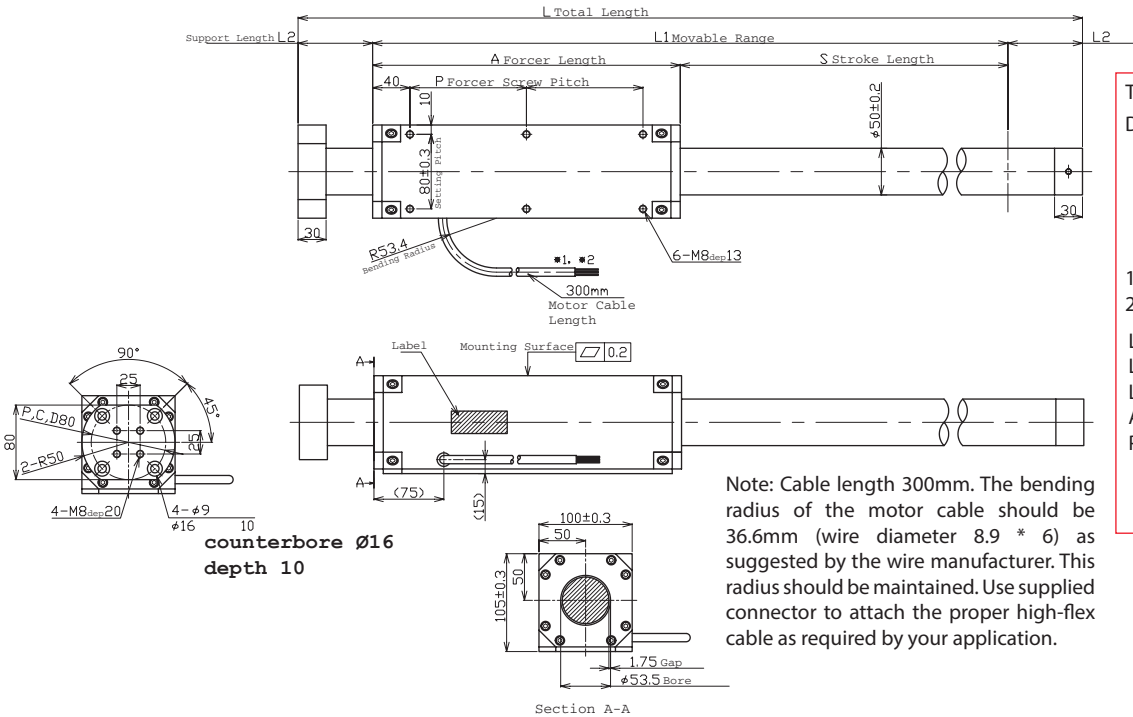

Tolerances are as follows:


| Dimension (mm) | Tolerance (mm) |
|----------------|----------------|
| 0 - 6 | ±0.1 |
| 7 - 30 | ±0.2 |
| 31 - 120 | ±0.3 |
| 121 - 315 | ±0.5 |
| 316 - 1000 | ±0.8 |
| 1001 - 2000 | ±1.2 |
| 2000 - | ±1.5 |

L = See Shaft Length
L1 = Usable Stroke + A
L2 = See Support Length
A = See Forcer Length
P = See Forcer Screw Pitch

Unless otherwise specified, dimensions are in mm

Note: Cable length 300mm. The bending radius of the motor cable should be 36.6mm (wire diameter 8.9 * 6) as suggested by the wire manufacturer. This radius should be maintained. Use supplied connector to attach the proper high-flex cable as required by your application.

Hall Effect Specs

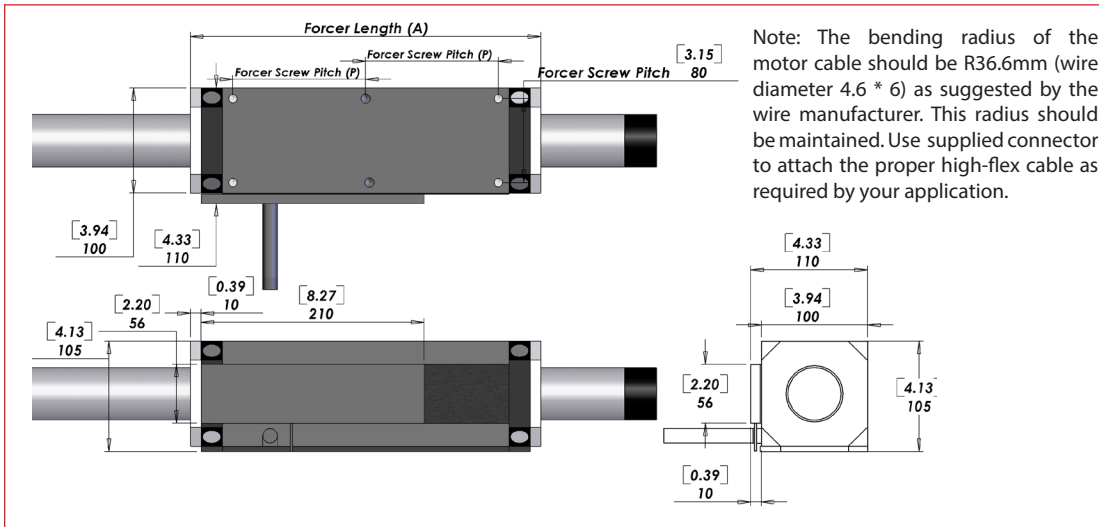

Sensor Cable Specs

| | |
|-----------|--------------|
| Wire Type | UL 758 |
| Wire AWG | 28 |
| VCC | White/Red |
| GND | White/Black |
| Sensor 1 | Orange/Red |
| Sensor 2 | Orange/Black |
| Sensor 3 | Gray/Red |

The bending radius of the sensor cable should be R27.6mm (wire diameter 6.1 * 6) as suggested by the wire manufacturer. This radius should be maintained. Attach the proper high flex cable as required by your application.

Forcer Spacing Distance

| Spec | S500T | S500Q |
|-------------------------|-------|-------|
| Forcer Spacing Distance | 30mm | |
| Pole (N/S) Distance | 90mm | |
| Forcer Length | 330mm | 420mm |
| Flip Forcers | No | Yes |

Tandem S500D forcers are possible, but are equivalent to one (1) S500Q forcer and thus are not listed above.

Tandem Forcer



Support and Bending

| Stroke | Support Length (L2) | Max. Bending |
|----------|---------------------|--------------|
| 0~750 | 80mm | 0.00mm |
| 800~max. | 100mm | 0.15mm |

Shaft Diameter (D) - 50mm ±0.2

Total Length (L)=Stroke (S)+Forcer Length (A)+ (Support Length (L2)x2)

Shaft Length (L)

| Stroke | S500D | S500T | S500Q |
|--------|--------------------------------------------------|-----------------|------------------|
| 100 | Stroke is less than the electrical cycle length. | | |
| 150 | Contact Nippon Pulse. | | |
| 200 | 600mm (23.6in) | 690mm (27.2in) | 780mm (30.7in) |
| 250 | 650mm (25.6in) | 740mm (29.1in) | 830mm (32.7in) |
| 300 | 700mm (27.6in) | 790mm (31.1in) | 880mm (34.6in) |
| 350 | 750mm (29.5in) | 840mm (33.1in) | 930mm (36.6in) |
| 400 | 800mm (31.5in) | 890mm (35in) | 980mm (38.6in) |
| 450 | 850mm (33.5in) | 940mm (37in) | 1030mm (40.6in) |
| 500 | 900mm (35.4in) | 990mm (39in) | 1080mm (42.5in) |
| 550 | 950mm (37.4in) | 1040mm (40.9in) | 1130mm (44.5in) |
| 600 | 1000mm (39.4in) | 1090mm (42.9in) | 1180mm (46.5in) |
| 650 | 1050mm (41.3in) | 1140mm (44.9in) | 1230mm (48.4in) |
| 700 | 1100mm (43.3in) | 1190mm (46.9in) | 1280mm (50.4in) |
| 750 | 1150mm (45.3in) | 1240mm (48.8in) | 1330mm (52.4in) |
| 800 | 1240mm (48.8in) | 1330mm (52.4in) | 1420mm (55.9in) |
| 850 | 1290mm (50.8in) | 1380mm (54.3in) | 1470mm (57.9in) |
| 900 | 1340mm (52.8in) | 1430mm (56.3in) | 1520mm (59.8in) |
| 950 | 1390mm (54.7in) | 1480mm (58.3in) | 1570mm (61.8in) |
| 1000 | 1440mm (56.7in) | 1530mm (60.2in) | 1620mm (63.8in) |
| 1050 | 1490mm (58.7in) | 1580mm (62.2in) | 1670mm (65.7in) |
| 1100 | 1540mm (60.6in) | 1630mm (64.2in) | 1720mm (67.7in) |
| 1150 | 1590mm (62.6in) | 1680mm (66.1in) | 1770mm (69.7in) |
| 1200 | 1640mm (64.6in) | 1730mm (68.1in) | 1820mm (71.7in) |
| 1250 | 1690mm (66.5in) | 1780mm (70.1in) | 1870mm (73.6in) |
| 1300 | 1740mm (68.5in) | 1830mm (72in) | 1920mm (75.6in) |
| 1350 | 1790mm (70.5in) | 1880mm (74in) | 1970mm (77.6in) |
| 1400 | 1840mm (72.4in) | 1930mm (76in) | 2020mm (79.5in) |
| 1450 | 1890mm (74.4in) | 1980mm (78in) | 2070mm (81.5in) |
| 1500 | 1940mm (76.4in) | 2030mm (79.9in) | 2120mm (83.5in) |
| 1550 | 1990mm (78.3in) | 2080mm (81.9in) | 2170mm (85.4in) |
| 1600 | 2040mm (80.3in) | 2130mm (83.9in) | 2220mm (87.4in) |
| 1650 | 2090mm (82.3in) | 2180mm (85.8in) | 2270mm (89.4in) |
| 1700 | 2140mm (84.3in) | 2230mm (87.8in) | 2320mm (91.3in) |
| 1750 | 2190mm (86.2in) | 2280mm (89.8in) | 2370mm (93.3in) |
| 1800 | 2240mm (88.2in) | 2330mm (91.7in) | 2420mm (95.3in) |
| 1850 | 2290mm (90.2in) | 2380mm (93.7in) | 2470mm (97.2in) |
| 1900 | 2340mm (92.1in) | 2430mm (95.7in) | 2520mm (99.2in) |
| 1950 | 2390mm (94.1in) | 2480mm (97.6in) | 2570mm (101.2in) |
| 2000 | 2440mm (96.1in) | 2530mm (99.6in) | 2620mm (103.1in) |

Shaft Mass

| Stroke | S500D | S500T | S500Q |
|--------|--------------------------------------------------|-----------------|-----------------|
| 100 | Stroke is less than the electrical cycle length. | | |
| 150 | Contact Nippon Pulse. | | |
| 200 | 7.9kg (17.4lb) | 9.1kg (20lb) | 10.2kg (22.6lb) |
| 250 | 8.5kg (18.8lb) | 9.7kg (21.4lb) | 10.9kg (24lb) |
| 300 | 9.2kg (20.3lb) | 10.4kg (22.9lb) | 11.6kg (25.5lb) |
| 350 | 9.8kg (21.7lb) | 11kg (24.3lb) | 12.2kg (26.9lb) |
| 400 | 10.5kg (23.2lb) | 11.7kg (25.8lb) | 12.9kg (28.4lb) |
| 450 | 11.2kg (24.6lb) | 12.3kg (27.2lb) | 13.5kg (29.8lb) |
| 500 | 11.8kg (26.1lb) | 13kg (28.7lb) | 14.2kg (31.3lb) |
| 550 | 12.5kg (27.5lb) | 13.7kg (30.1lb) | 14.8kg (32.7lb) |
| 600 | 13.1kg (28.9lb) | 14.3kg (31.6lb) | 15.5kg (34.2lb) |
| 650 | 13.8kg (30.4lb) | 15kg (33lb) | 16.1kg (35.6lb) |
| 700 | 14.4kg (31.8lb) | 15.6kg (34.4lb) | 16.8kg (37.1lb) |
| 750 | 15.1kg (33.3lb) | 16.3kg (35.9lb) | 17.5kg (38.5lb) |
| 800 | 16.3kg (35.9lb) | 17.5kg (38.5lb) | 18.6kg (41.1lb) |
| 850 | 16.9kg (37.3lb) | 18.1kg (39.9lb) | 19.3kg (42.6lb) |
| 900 | 17.6kg (38.8lb) | 18.8kg (41.4lb) | 20kg (44lb) |
| 950 | 18.3kg (40.2lb) | 19.4kg (42.8lb) | 20.6kg (45.4lb) |
| 1000 | 18.9kg (41.7lb) | 20.1kg (44.3lb) | 21.3kg (46.9lb) |
| 1050 | 19.6kg (43.1lb) | 20.7kg (45.7lb) | 21.9kg (48.3lb) |
| 1100 | 20.2kg (44.6lb) | 21.4kg (47.2lb) | 22.6kg (49.8lb) |
| 1150 | 20.9kg (46lb) | 22.1kg (48.6lb) | 23.2kg (51.2lb) |
| 1200 | 21.5kg (47.5lb) | 22.7kg (50.1lb) | 23.9kg (52.7lb) |
| 1250 | 22.2kg (48.9lb) | 23.4kg (51.5lb) | 24.6kg (54.1lb) |
| 1300 | 22.8kg (50.4lb) | 24kg (53lb) | 25.2kg (55.6lb) |
| 1350 | 23.5kg (51.8lb) | 24.7kg (54.4lb) | 25.9kg (57lb) |
| 1400 | 24.2kg (53.3lb) | 25.3kg (55.9lb) | 26.5kg (58.5lb) |
| 1450 | 24.8kg (54.7lb) | 26kg (57.3lb) | 27.2kg (59.9lb) |
| 1500 | 25.5kg (56.2lb) | 26.7kg (58.8lb) | 27.8kg (61.4lb) |
| 1550 | 26.1kg (57.6lb) | 27.3kg (60.2lb) | 28.5kg (62.8lb) |
| 1600 | 26.8kg (59.1lb) | 28kg (61.7lb) | 29.1kg (64.3lb) |
| 1650 | 27.4kg (60.5lb) | 28.6kg (63.1lb) | 29.8kg (65.7lb) |
| 1700 | 28.1kg (61.9lb) | 29.3kg (64.6lb) | 30.5kg (67.2lb) |
| 1750 | 28.8kg (63.4lb) | 29.9kg (66lb) | 31.1kg (68.6lb) |
| 1800 | 29.4kg (64.8lb) | 30.6kg (67.4lb) | 31.8kg (70.1lb) |
| 1850 | 30.1kg (66.3lb) | 31.2kg (68.9lb) | 32.4kg (71.5lb) |
| 1900 | 30.7kg (67.7lb) | 31.9kg (70.3lb) | 33.1kg (72.9lb) |
| 1950 | 31.4kg (69.2lb) | 32.6kg (71.8lb) | 33.7kg (74.4lb) |
| 2000 | 32kg (70.6lb) | 33.2kg (73.2lb) | 34.4kg (75.8lb) |

Additional stroke lengths are available (up to 3380mm for S500D, 3290mm for S500T, and 3200mm for S500Q). Contact Nippon Pulse for more information.

FGA/CE Type Motor Cable

| | |
|-----------|---------|
| Wire Type | UL 1330 |
| Wire AWG | 24 |
| U Phase | Red |
| V Phase | White |
| W Phase | Black |

| | |
|--------------|--------------|
| Ground Wire | CE |
| Wire Type | UL 1330 |
| Wire AWG | 20 |
| Frame Ground | Green/Yellow |

300mm lead wire bare leads. The bending radius of the motor cable should be 16.96mm as suggested by the wire manufacturer.

Connector (Motor Cable)

| | |
|--------------------|--------------|
| Receptacle Housing | VLR-03V |
| Plug Housing | VLP-03V |
| Retainer | VLS-03V |
| Pin Contact | SVM-61T-P2.0 |
| Socket Contact | SVF-61T-P2.0 |


To be installed by the user.

Lead Wire

| | |
|-----------|-----------|
| Wire Type | UL 2570FA |
| Wire AWG | 14 |
| U Phase | Red |
| V Phase | White |
| W Phase | Black |

300mm lead wire bare leads. The bending radius of the motor cable should be 36.6mm as suggested by the wire manufacturer.

THM Option

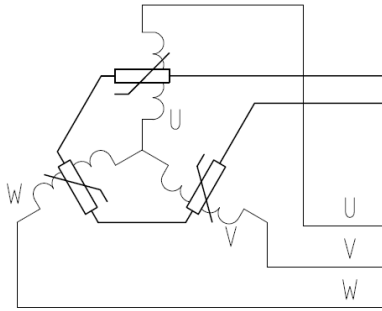

Circuit Diagram

4. Thermistor
PTCSL20T071DBE(Vishay)

Thermocouple

Thermal sensor
Thermocouple K type (marked each phase name)
Attached to the surface of inside of coil
Length 3000mm

These motors have not received a CE Declaration of Conformity, and as such are designated FGA.

Note: Metric units guaranteed. Imperial (United States customary) units are calculated.

For assistance in selecting the best motor for your application, contact Nippon Pulse
to speak with an applications engineer. 1-540-633-1677

www.nipponpulse.com